



Beam-L Series

Beam-L allows total control of illumination, ideal for art galleries, museums and high-end retail spaces. Installation to 3-Circuit tracks with orientation made easy by 350° rotation and balanced 90° vertical adjustability.


Precise Control of Light Shape

Beam-L light cone is adjusted by 4-pin framers, allowing users to shape the light beam in circular and rectangular shapes. Simultaneously, in-built zoom function by rotating the lens makes Beam-L a high precision lighting tool for focused illumination.


Technical Family Data

Power Range	19W (Dip Switch: 450mA)
Installation	3-Circuit Tracks
Connection	220-240Vac, 50/60Hz
	Citizen High Intensity, Ra94
COB Type	3000K, 4000K
	Other CCTs by Request
Lumen Class	750 Lm
Control Types	On/Off, DALI, CASAMBI, TRIAC
Color Tolerance	3-SDCM
	15°-25° or 25°-45°
Optics	Zoom Function by Optics Rotation
	Contour Optics with 4-Pin Light Beam Shape Adjustment
Lumen Maintenance	L90B50 >50.000h
Material	Powder Coated Die Cast Aluminium
Protection	Class II, IP 20
Weight	1000g
Colors	Matt Black, Matt White

Light Distribution

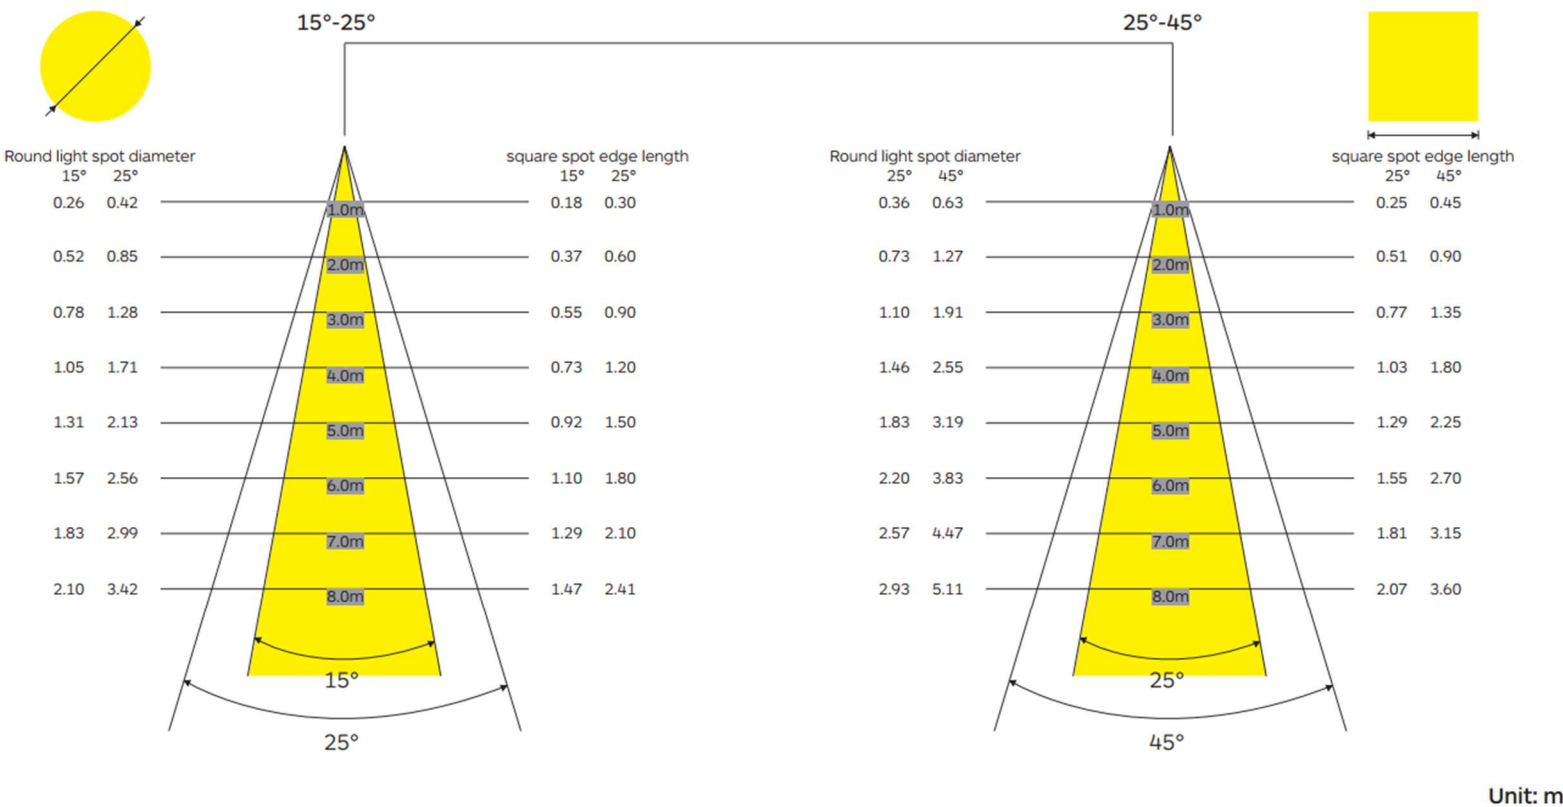

Dimensional Sketch

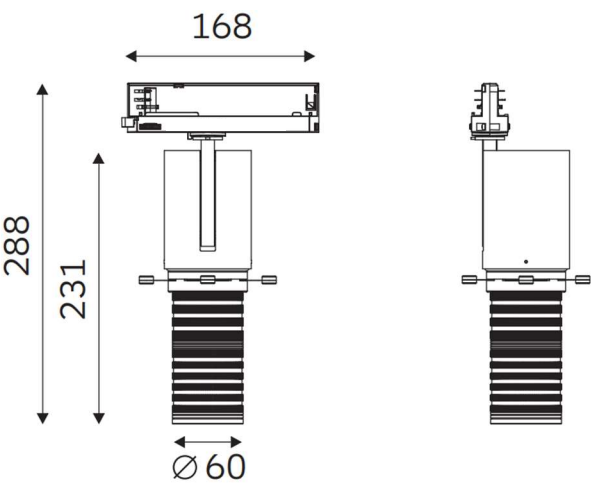

Technical details are subject to change. Luminous flux, connected load and efficiency values have +/- 10% tolerance.

Product Family Imagery

